

260L

TANK CAPACITY

2 - 6

PEOPLE

24-32

STCS

6 YEAR

WARRANTY

70°C

MAX TEMP.



350% efficiency rating reduces running costs versus gas and electric water heaters.



Registered Clean Energy product with annual carbon reduction rating of 3 tonnes.



Non-sacrificial impressed current anode provides protection in soft and hard water conditions.



Integrate and maximise your solar PV with in-built timer controlled heat up cycles.



Dual heating technology with incorporated electric element to provide hot water up to 70°C.





R290 natural refrigerant with effectively zero global warming potential compared to synthetic





Hydrotherm's comprehensive 6 year warranty covers all parts and tank in full, including any labour charges. Have peace of mind that you'll be covered.

PLUMBING PARAMETERS

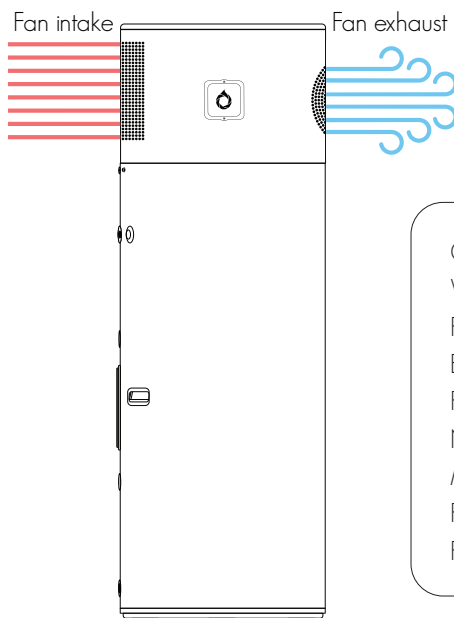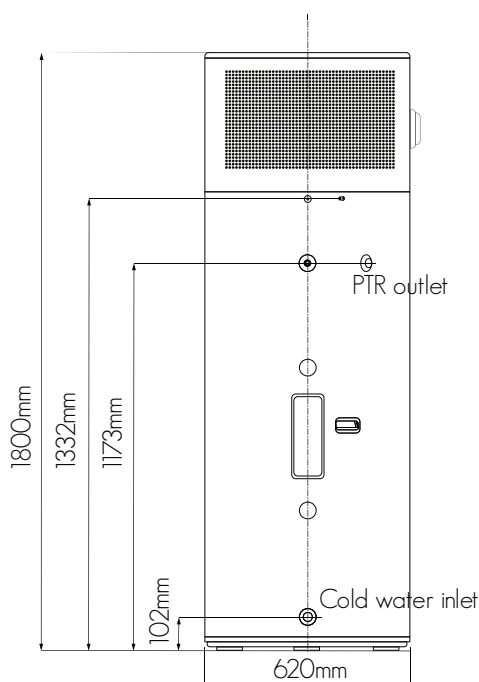


Condensate	Elbow (supplied)
Water Connections	3/4" G
PTR	850kPa (supplied)
ECV	700kPa (suggested)
Pressure Reduction Valve	500kPa (max)
Nett Weight (empty)	118kg
Min. Base Size	0.6m x 0.6m
Packed Weight	137kg
Packed Dimensions	0.7m x 0.7m x 2.0m

TECHNICAL PARAMETERS

Power Supply	240V/Single
Circuit	10 Amp
Input Rating	700W
Compressor	Rotary
Refrigerant	R290 (350g)
Tank Material	Vitreous enamel
Element Rating	1.8kW
Tank Volume	260L
Tank Recovery	260 minutes*
COP	4.15*
Heating Capacity	2.82kW*

*40°C water temperature rise at 19°C air temperature

STC VALUES

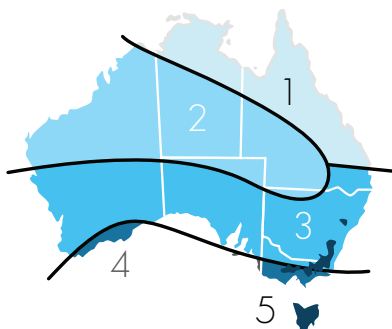

Zone 1 = 25

Zone 2 = 23

Zone 3 = 30

Zone 4 = 32

Zone 5 = 31